

Technical data sheet

Screed-flush trunking unit – OKB-FK 400



Item number: 7403605



Ready-to-mount trunking unit for cable routing and device installation, consisting of a trunking base with height-adjustable covering contact profile. With mounting protection lid in the as-delivered state. The scope of delivery contains three lid butt seals and a trunking connector.

For height adjustment of the trunking unit, six height adjustment screws are required.




St Steel

FS Strip galvanized

Master data

| | |
|---------------------|--------------------------|
| Item number | 7403605 |
| Type | OKB-FK 400 |
| Description 1 | Flushfloor trunking unit |
| Description 2 | with protective lid |
| Manufacturer | OBO |
| Dimension | 2000x400x62 |
| Material | Steel |
| Surface | Strip galvanized |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 2 |
| Unit of quantity | Metre |
| Weight | 1505 kg |
| Weight unit | kg/100 m |

Dimensions

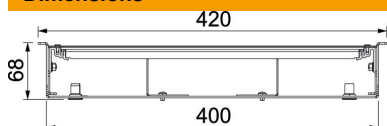

| | |
|--------|----------|
| Length | 2,000 mm |
| Width | 400 mm |
| Height | 73 mm |

Technical data sheet

Screed-flush trunking unit – OKB-FK 400

Item number: 7403605



Technical data

| | |
|--|---------------------------------|
| Mounting opening cover | yes |
| Number of compartments | 2 St. |
| Expansion option | For installation of accessories |
| Floor plate | yes |
| Floor care | Dry |
| Cover fastening, locking | no |
| Seal installation option | no |
| Installation opening for on-floor tank | no |
| Decouplable | no |
| Suitable for expansion joint | no |
| Duct height, min. | 68 mm |
| Minimum screed height | 73 |
| With connection opening | no |
| With equipotential bonding | yes |
| With separating retainer | yes |
| With overhang | yes |
| Removable cover | no |
| Heavy-duty version | no |
| Separating retainer fastening | rasten |
| Separating retainer fastening | Lock |