


# Technical data sheet

## Cable tray SKSU 110 FT

Item number: 6064810



SKS 110 = Heavy-duty cable tray system in 110 mm side height  
Die Kabelrinne wird auf dem Ausleger mit Schrauben Typ FRS M6 x 12 befestigt.  
Magnetic shield insulation without cover 20 dB, with cover 50 dB.

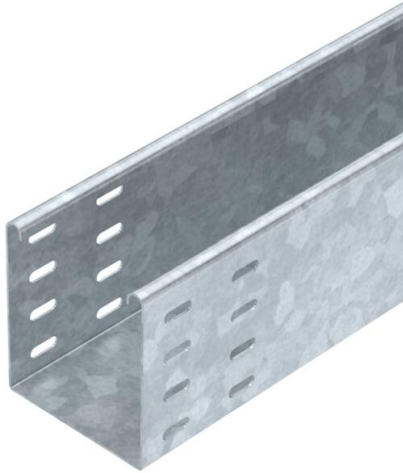

St

Steel

FT

Hot-dip galvanised

### Master data

|                     |                               |
|---------------------|-------------------------------|
| Item number         | 6064810                       |
| Type                | SKSU 110 FT 6                 |
| Description 1       | Cable tray SKSU               |
| Description 2       | unperforated, connector holes |
| Manufacturer        | OBO                           |
| Dimension           | 110x100x6000                  |
| Material            | Steel                         |
| Surface             | Hot-dip galvanised            |
| Surface standard    | DIN EN ISO 1461               |
| Smallest sales unit | 6                             |
| Unit of quantity    | Metre                         |
| Weight              | 434.766 kg                    |
| Weight unit         | kg/100 m                      |

# Technical data sheet

## Cable tray SKSU 110 FT

Item number: 6064810



### Dimensions



|                 |          |
|-----------------|----------|
| Length          | 6,000 mm |
| Width           | 100 mm   |
| Height          | 110 mm   |
| Plate thickness | 1.5 mm   |

### Technical data

|                                |                       |
|--------------------------------|-----------------------|
| Connector version              | Without connectors    |
| Mounting system fastening type | Floor Ceiling Wall    |
| Maintain electrical functions  | no                    |
| Mounting perforation in base   | yes                   |
| NATO hole pattern              | no                    |
| Usable cross-section           | 108 cm <sup>2</sup>   |
| Usable cross-section           | 10800 mm <sup>2</sup> |
| Rustproof steel, pickled       | no                    |
| Side perforation               | yes                   |
| Wide-span version              | no                    |

### Loads

|                                   |           |
|-----------------------------------|-----------|
| Insertable support spacings, min. | 1.5 m     |
| Insertable support spacings, max. | 4 m       |
| Support spacing 1.5 m             | 3 kN/m    |
| Support spacing 2.0 m             | 2.4 kN/m  |
| Support spacing 2.5 m             | 1.76 kN/m |
| Support spacing 3.0 m             | 1.2 kN/m  |
| Support spacing 3.5 m             | 0.84 kN/m |
| Support spacing 4.0 m             | 0.8 kN/m  |