

Technical data sheet

US 7 support A2

Item number: 6341772



U support in fixed lengths. Dimensions 70 x 50 mm.
For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 61.



A2 Stainless steel

2B Bright, treated

Master data

| | |
|---------------------|--------------------|
| Item number | 6341772 |
| Type | US 7 60 A2 |
| Description 1 | U support |
| Description 2 | 3-sided perforated |
| Manufacturer | OBO |
| Dimension | 70x50x600 |
| Material | Stainless steel |
| Surface | Bright, treated |
| Surface standard | |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 235.3 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

US 7 support A2

Item number: 6341772



Dimensions

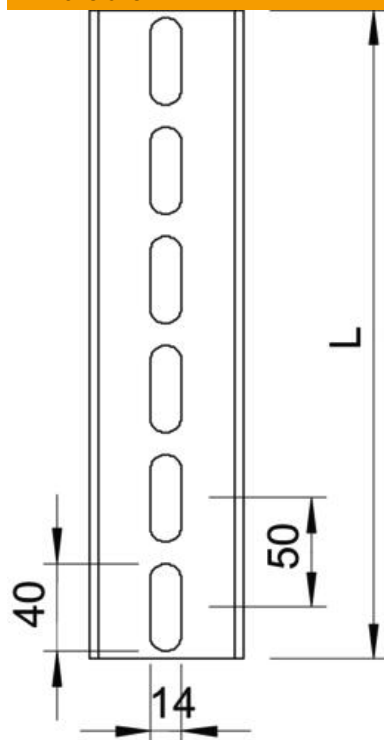

| | |
|-----------|-------------|
| Dimension | 70 x 50 x 4 |
| Length | 600 mm |
| Width | 70 mm |
| Height | 50 mm |



Technical data sheet

US 7 support A2

Item number: 6341772



Technical data

| | |
|-------------------------------|-----------------------|
| Breakable | no |
| Type of perforation | 3 sides perforated |
| Version for | Single profile |
| Maintain electrical functions | no |
| Hole width | 14 mm |
| Material thickness | 4 mm |
| With tothing | no |
| Profile shape | U profile |
| Slot width | 40 mm |
| Static value A | 4.59 cm ² |
| Static value Iy | 13.79 cm |
| Static value Iz | 36.84 cm |
| Static value Wy | 4.11 cm ² |
| Static value Wz | 10.53 cm ² |